

AWNING WINDOW

AA SERIES



Outer frame & sash corners are mitred, enhancing the clean appearance of the window. All fixings are made from durable stainless steel

Controlled ventilation also allows protection from rain

Lockable chainwinders are fitted as standard

The optional sill flap can be specified when required

When fully open, stainless steel, double-action stays help the sash step out slightly at the top, encouraging more efficient ventilation


The optional snap-in frame closure has a 15 x 3mm pocket to insert flashing into, whilst the inline reveal simplifies installation into a broad range of construction styles

All glass is installed into dual vinyl sided rebates, ensuring vibration free glazing



AWNING WINDOW

AA SERIES

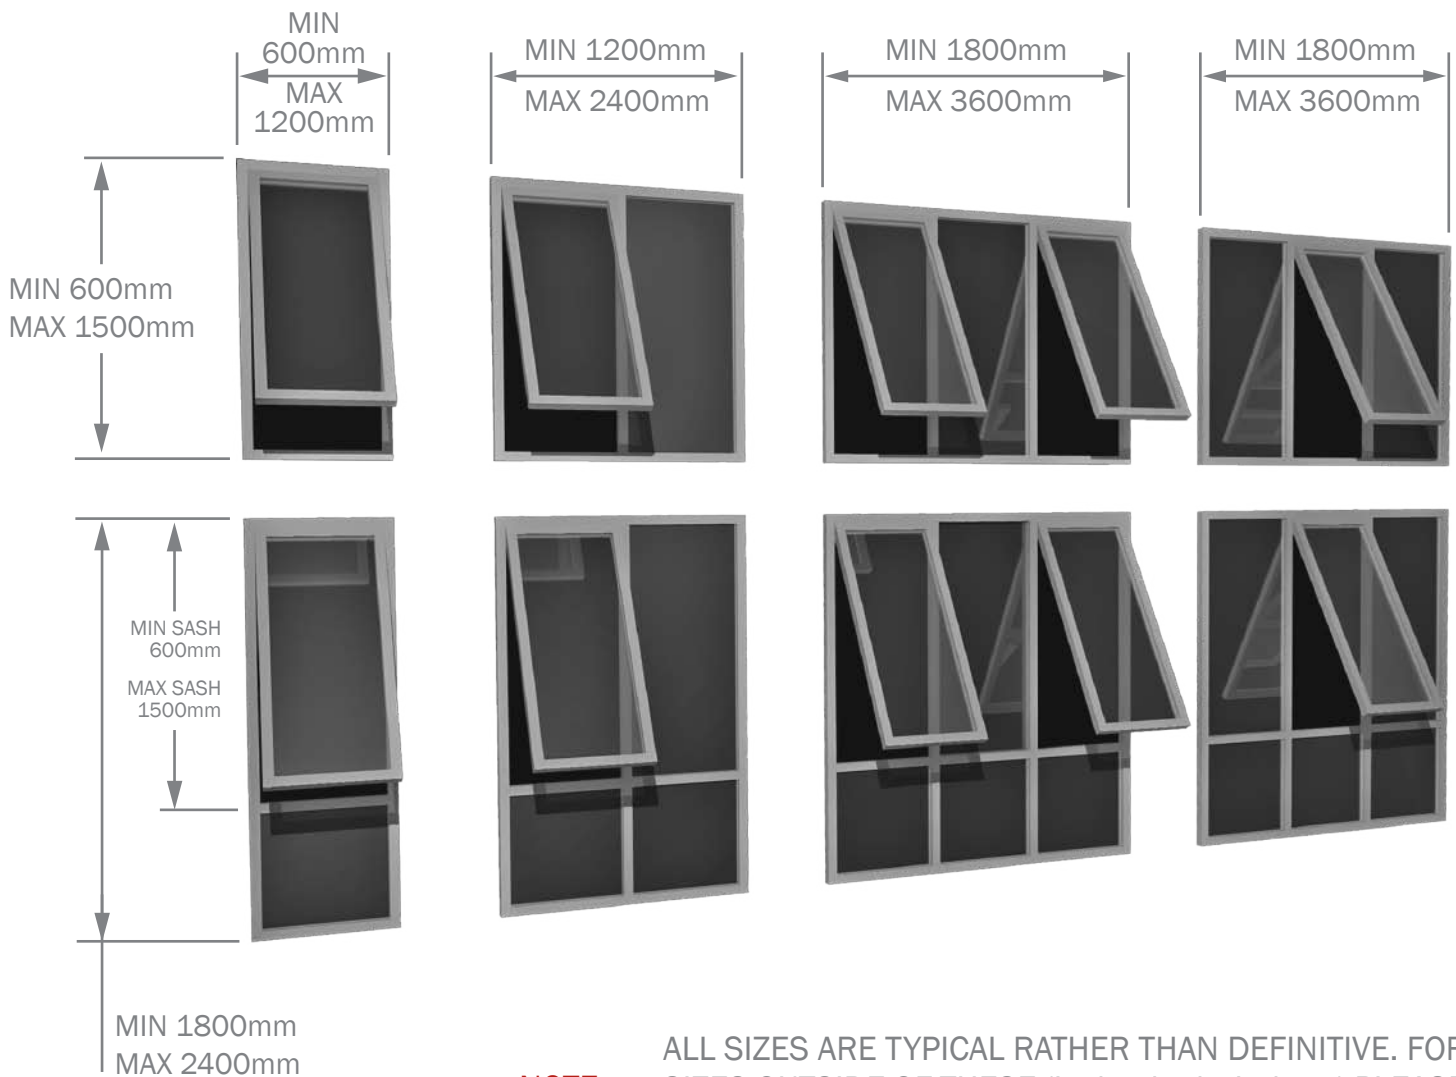

NOTE:

ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE (incl. raked windows) PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

Sizing

Window style & opening detail should be considered as viewed externally

Sizes indicated are the overall window size. Reveal is inline with outer frame dimension.

For Stud openings add 20mm to both height & width

Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

Maximum double glazed panel thickness is 22mm

Certification

Certified performance data including WERS ratings are

available for this product on request

Specify

Frame colour, configuration, height, width & overall depth

Optional: chainwinder colour, frame infill, sill flap, glass type