

# SLIDING DOOR

## AA SERIES



Sliding doors encourage access to the outdoors from interior living spaces, permitting egress & efficient ventilation. The slimline layout results in minimal intrusion into rooms or walkways



The secure lock assembly features anti-lift pins & is key lockable from both sides


Outer frame corners are mitred for a clean appearance. All fixings are made from durable stainless steel

All glass is installed into dual vinyl sided rebates, ensuring vibration free glazing. Sliding panels are weatherproofed through dual wool-pile seals at the head, jamb, sill & interlocker

Fly screens fit to the outside, & run on tracks within the door's outer frame


All panels roll on two 50kg rated, ball-bearing carriages which run on an anodised track insert

The optional snap-in frame closure has a 15 x 3mm pocket for flashing insertion, whilst the inline reveal simplifies installation into a broad range of construction styles

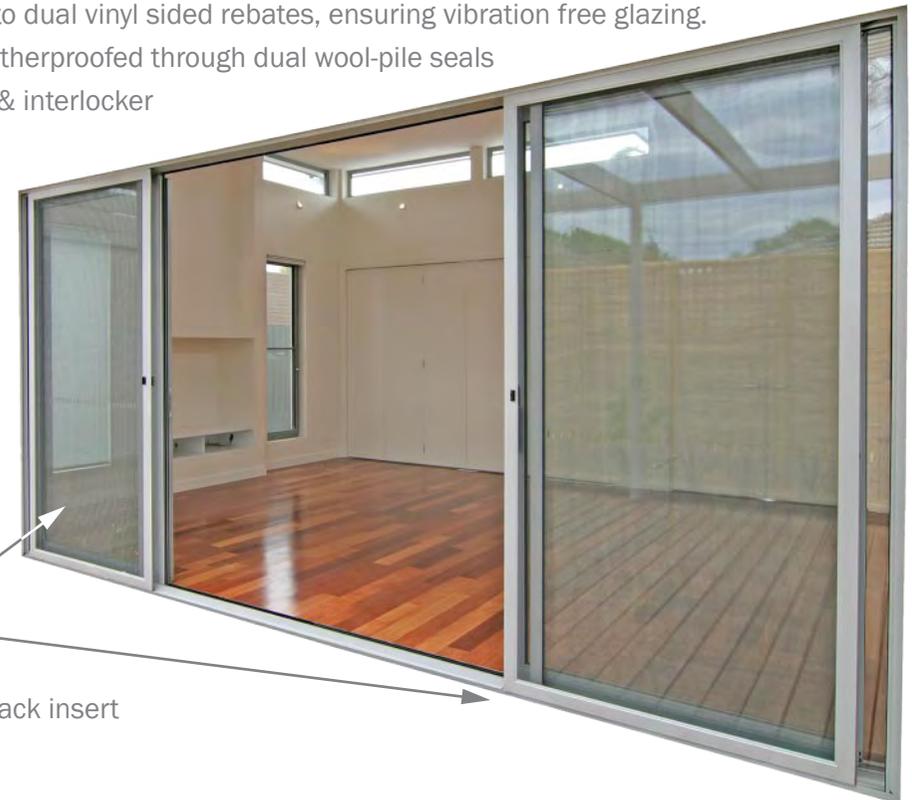

# SLIDING DOOR

## AA SERIES

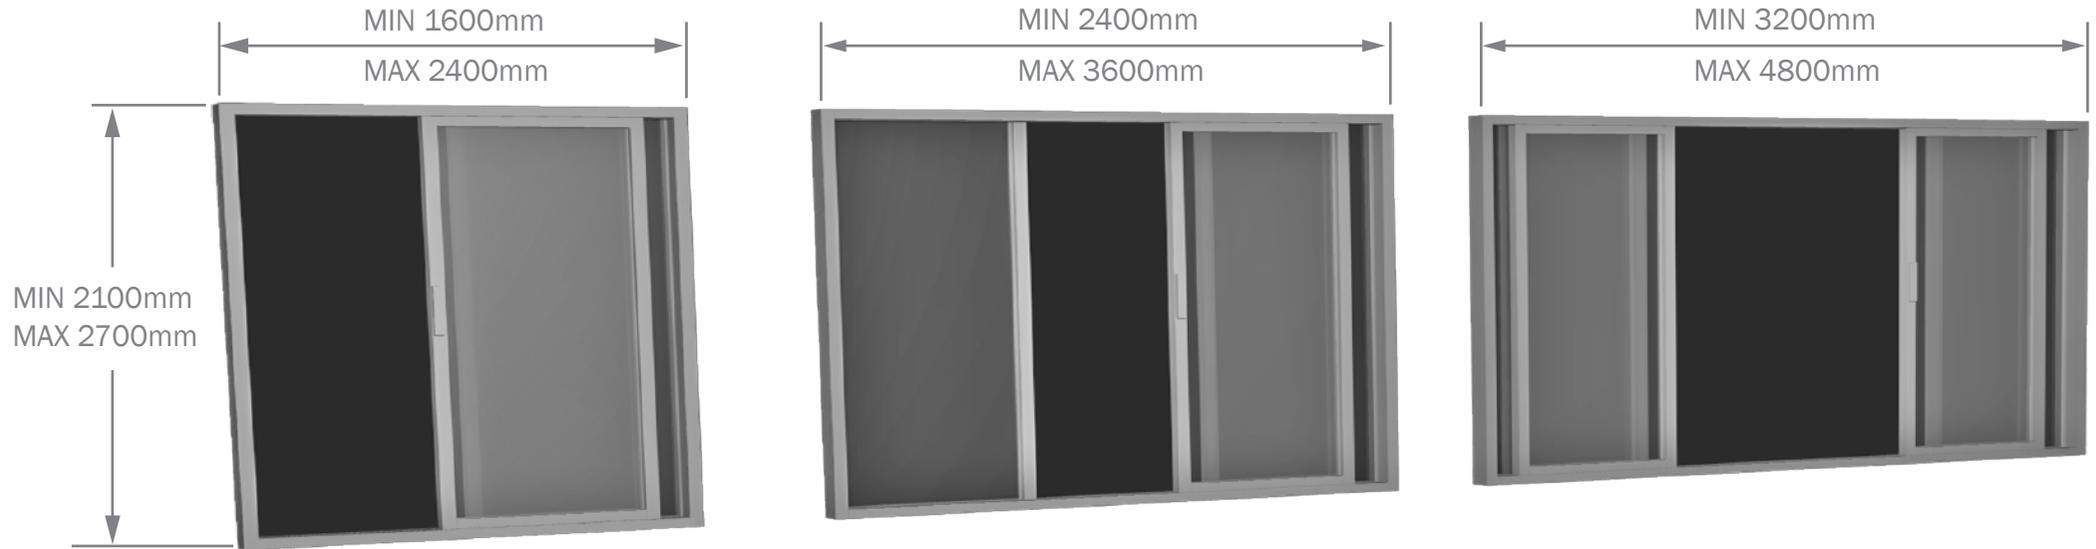

**NOTE:** ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR PRACTICAL PURPOSES, WHERE DOOR HEIGHT EXCEEDS 2400mm, A SLIDING PANEL WIDTH RESTRICTION OF 1000mm APPLIES. FOR SIZES OUTSIDE OF THESE PLEASE TALK WITH YOUR RYLOCK SALES CONSULTANT

### Sizing

Door style & opening detail should be considered as viewed externally

Sizes indicated are the overall door size. For Stud openings add 20mm to both height & width

### Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

Glazing to be grade A safety glass

### Certification

Certified performance data including WERS ratings are available for this product on request

### Specify

Frame colour, configuration, height, width & depth

Optional: handle type & colour, patio bolts, flyscreen, frame infill, frame equaliser, sill flap, glass type