

OPERATED CASEMENT



AA SERIES

Casement windows allow for efficient ventilation, through the use of cross-breezes. The Rylock Operated Casement makes controlling breezes easier, with the operator allowing precise direction of breezes through the home. The operator also means that the fly-screens do not need to be disturbed

Outer frame & sash corners are mitred, enhancing the clean appearance of the window. The substantial 90mm frame couples neatly with large fixed panels & a variety of door products

To ensure a tight seal when closed, additional latches clamp the sash tightly against the frame




The operator handle folds neatly away from window dressings, giving a clean internal appearance. Fly screens are easily removed from the inside for cleaning



OPERATED CASEMENT



AA SERIES

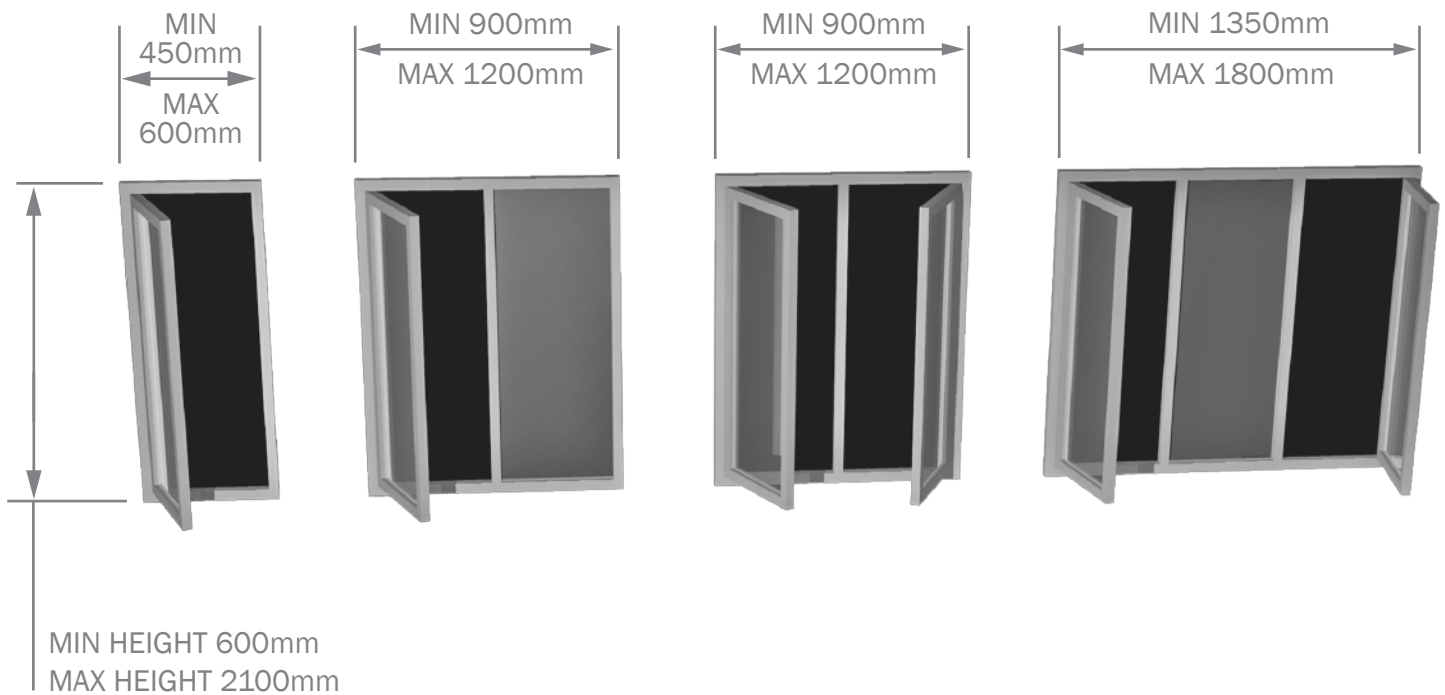

NOTE:

ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE (incl. raked windows) PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

Sizing

Window style & opening detail should be considered as viewed externally

Sizes indicated are the overall window size. Reveal is inline with outer frame dimension.

For Stud openings add 20mm to both height & width

Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006

Maximum double glazed panel thickness is 22mm

Maximum sash weight of 25kg (typically 4mm glass / 12mm argon / 4mm glass)

Certification

Certified performance data including WERS ratings are available for this product on request

Specify

Frame colour, configuration, height, width & overall depth

Optional: Operator & latch colour, frame equaliser, frame infill, sill flap, glass type