


# COUNTER BALANCED DOUBLE-HUNG WINDOW (Rw43)



## RYLOCK ACOUSTIC SERIES

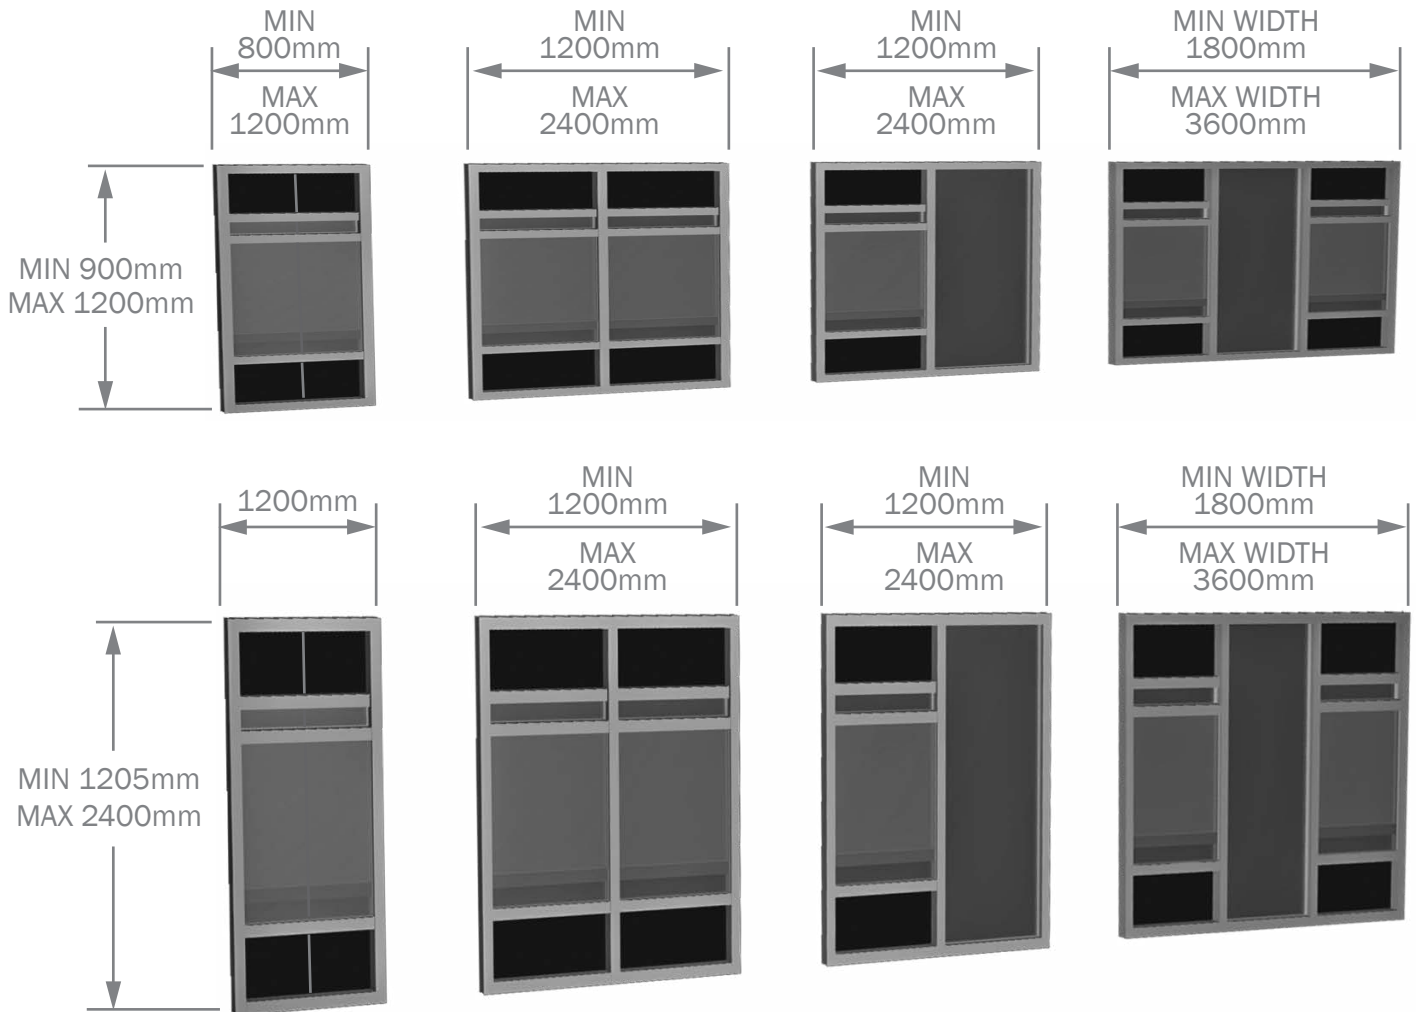

**SIZE RESTRICTION:** PRODUCT WIDTH CAN NEVER EXCEED HEIGHT

### NOTE:

ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE, PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT.  
SINGLE OUTER FRAME WINDOWS WILL BE 'SPLIT' VERTICALLY BY THE SECONDARY GLAZING FRAME (IN THE CENTRE)

### Sizing

Window style & opening detail should be considered as viewed externally  
Product depth is greater-than-or-equal-to 215mm, due to acoustic spacing between panes  
Sizes indicated are the overall window size. Reveal is inline with outer frame dimension  
For Stud openings add 20mm to both height & width

### Glazing

Glazing strength to minimum N3 rating as per AS4055 - 2006  
External glazing is 6mm  
Internal glazing is 6.38mm

### Specify

Frame colour, configuration, height, width & overall depth  
Optional: flyscreen, external frame infill, sill flap, external glass type

### Performance

Performance Index Number Rw: 43

### Certification

Certified performance data (from CSIRO) for Rw, STC & Rw+Ctr are available for this product on request